


Vacuum Glass Lifter VB4 + 4 RCEBE d4

The VB4+4RCEBE d4 is vacuum lifter with electric tilt and rotation, battery operating system and dual vacuum circuit.

The VB4+4 RCMBM d4 is a below-the-hook lifting accessory suitable for lifting and handling of glass units weighing up to 1200 kg. The VB4+4 RCEBE d4 features electric tilt and electric 360 degree rotation.

The VB4+4 RCEBE d4 has removable pad arms that permits to adapt the lifter to different glass panels.

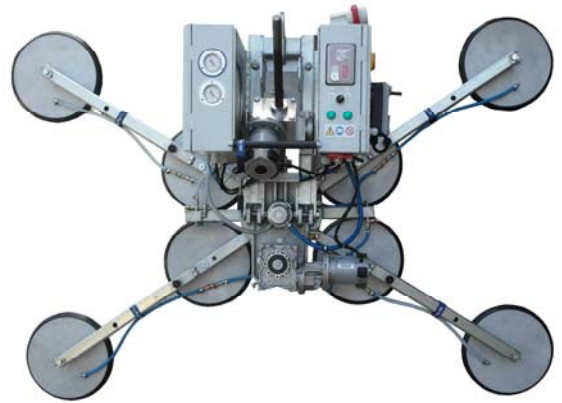

Technical specification

Application	glass panels
Lifting capacity	8 suction pads configuration max 1200 kg 4 suction pads configuration max 600 kg
Suction pads	number 8 round pads, diameter 390mm pads with safety ring and sealing lip 4 pads fixed on the frame, 4 pads on removable pad arms
Pad spread	mm 1020x795 in 4 pads configuration mm 2253x1595 in 8 pads configuration
Load movement	continuous powered 360 degree rotation 90 degree powered tilt
Operating system	DC vacuum pump powered from on-board batteries high capacity re-chargeable batteries battery status indicator economizer for reduction of the energy consumption
Vacuum system	2 independent vacuum circuits, each vacuum circuit with vacuum reserve and non return valve
Weight of lifter	Kg 225
Structural depth	mm 680
Control	Button cable command Radio remote control as optional
Standard features	Audible and visual low vacuum warning devices Vacuum gauge for each vacuum circuit Battery charger 240 Volt Vacuum filter Multi position hook connection

- Lifting capacity max 1200 kg
- No.8 larger suction pads Ø 390 mm
- Removable pad arms
- Battery operating system
- Electric continues 360° rotation
- Electric 90° tilt
- Low vacuum warning device

✓ Dual vacuum circuit built to EN13155 standard

